



# Exclusive technology

**Cultiplow®**

**Frame**

200x200 mm beam

**Pushing bar**

Centralized setting

**Spring (or optional)**

Unequal

**Standard coupling**

Cat. 3

**Carbide tip**

Serial: protection against wear  
Optional: Socs Easy-Carbi

**Parking stand**



Uncoupling total security

**Agronomy**


**NEW EASY-CARBI ploughshares**

**Performance**

**PATENTED**

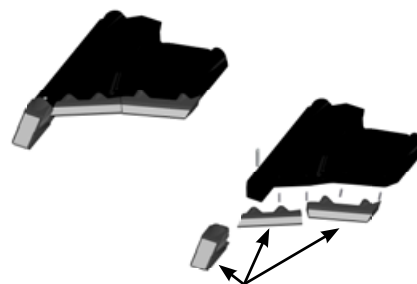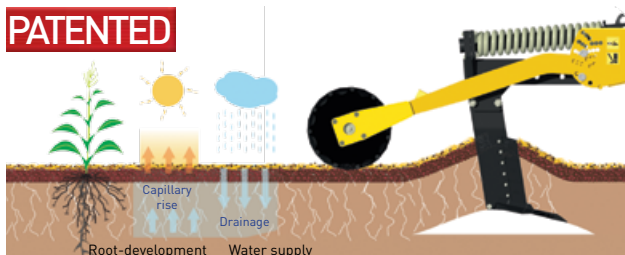

Parts easy to change without replacing the whole ploughshare.

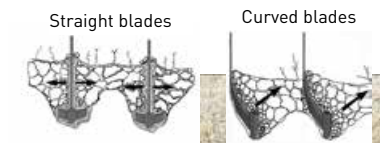

- No disturbance of horizons
- Vertical cracking by the creation of a wave
- Facilitates crop growing capillary rises

- Carbide protection on the whole ploughshare and the tip.
- Easy to change

- Homogeneous soil loosening
- Without «blockage effect»
- Without creation of clods



# The only known blade by des agronomists

Work from 15 cm to 45 cm deep From 5 to 10 km/h

ing security  
bolt security)

led clearance

## Combimulch 35

Preparation of the soil on the surface



## Ø526 cage roller


Several rollers according to your type of soil

## Multistop

Simplified setting of the working depth

## Shifted tip blade

TCS 750

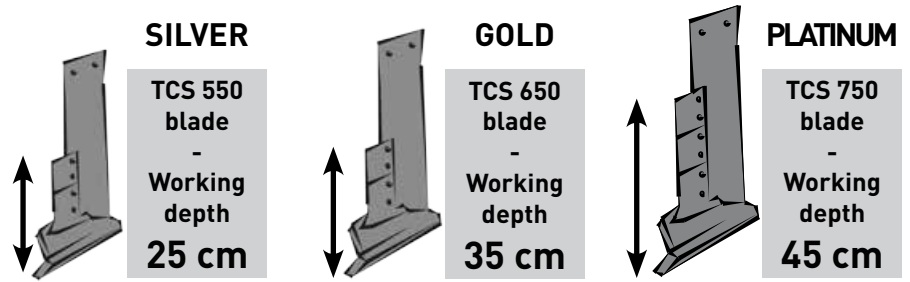


6 m foldable semi-mounted  
Ø526 cage roller

## Exclusivity




Grassland Cultiplow  
Ø540 Flexi-Sem roller

ce

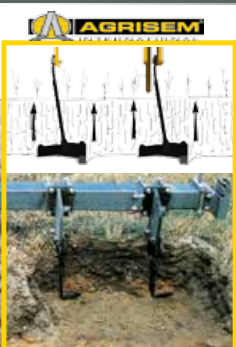

g on the entire width  
>


## Economy

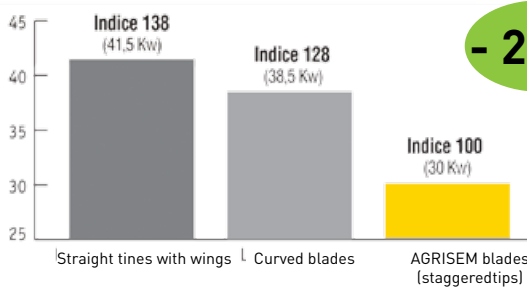

Résultats of official trials by Derval (FR).  
Power consumption of a 3m soil loosener working at 30 cm deep.


- Nearly 30% less power than a traditional soil loosener
- Improved productions

## Strong frame

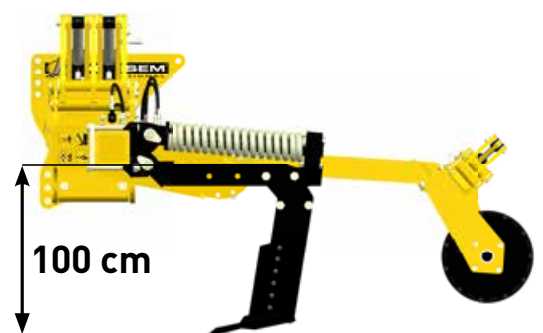

100 cm





- Important release under the frame
- Frame made for any type of use
- Different versions according to your equipments





SILVER	Fix versions	
 Working width	2,50 m	3,00 m
 Weight (kg) with cage roller	757	904
 Power (hp)	70-120	90-150
 Number of blades	4	5

# Specifications



Approved machine

GOLD	Fix versions				Retractable version	Foldable versions		
 Working width	2,50 m	3,00 m	3,50 m	4,00 m	4,00 m	4,50 m	6,00 m	8,00 m
 Weight (kg) with cage roller	1 593	1 911	2 269	2 627	3 034	4 613	5 361	7 147
 Power (hp)	90-180	110-210	150-230	170-250	170-250	200-280	280-380	380-450
 Number of blades	3	4	5	6	6	6	8	11

PLATINUM	Fix versions				Retractable version	Foldable versions		
 Working width	2,50 m	3,00 m	3,50 m	4,00 m	4,00 m	4,50 m	6,00 m	8,00 m
 Weight (kg) with cage roller	1 640	1 980	2 350	2 720	3 140	3 630	4 060	5 220
 Power (hp)	90-180	110-210	150-230	170-250	170-250	255-320	335-425	420-550
 Number of blades	3	4	5	6	6	6	8	11

## ROLLERS



Cage Ø526




Flexi-Sem Ø540



Steel-Pack Ø700




Combimulch 35

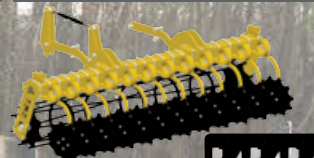

Combimulch 30



Combimulch 35 + Steel-Pack  
Only on fix version

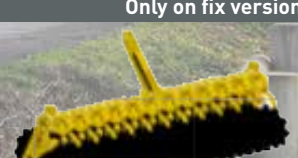

535 rue Pierre Levasseur  
44158 ANCENIS - FRANCE

T. +33 (0)2 51 14 14 40  
F. +33 (0)2 40 96 32 36

agrisem@agrisem.com  
www.agrisem.com



Your dealer